



Lightfire dolce vita Visible flame view for outdoor use

The light of warmth.

MAIN FEATURES

TECHNICAL

Decorating visible flame creates a glamour atmosphere.
Radiant heating flow along the glass tube.
Inox steel and galvanized/painted versions.
Led lighting kit with rechargeable battery optional.
Automatic and manual models.
Anti tipping device, windproof and ionization control flame.


END USER

Lamp/patio heater combined in an only one designing item.
Coffee table (optional).
Trolley wheels set (optional).
Belt for fastening any LPG cylinder.
Running by LPG and Natural Gas.
Designed by Francisco Gomez Paz.

01_ Flame view inside a glass tube.
Inox steel hat and windproof
anodized aluminium ring.



02_ Coffee Table

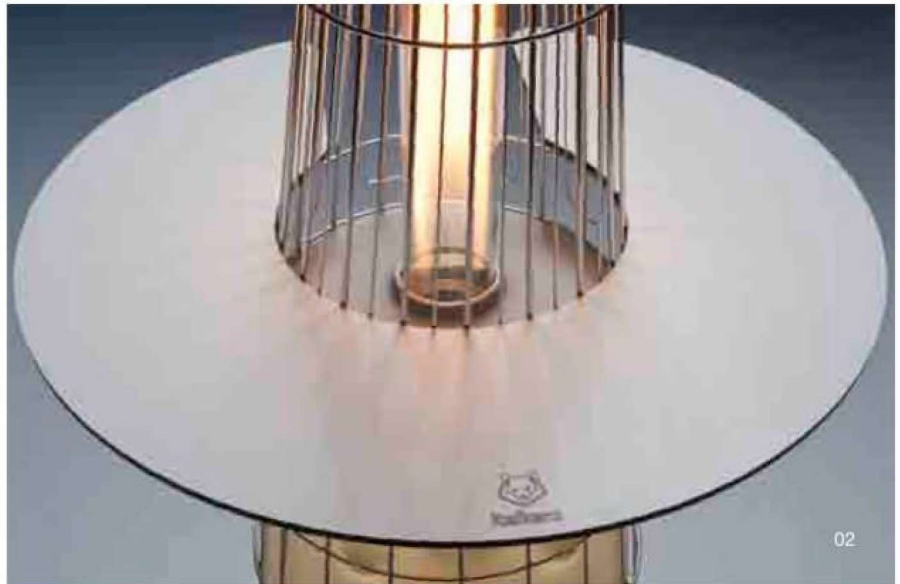


03_ Lighting led kit running by
rechargeable battery.
Trolley wheels set.





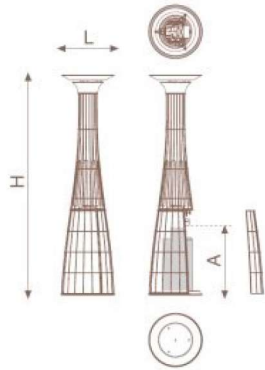


RANGE, SIZE AND WEIGHT




Model	manual	remote-controlled	u.m.
Hat (L)	545	545	mm
Base (L)	558	558	mm
Height (H)	2280	2280	mm
Height cylinder (A)	750	721	mm
Net weight	27	28	Kg
Gross weight	35	36	Kg


Equipped standard	
	· Trolley
	· Anti-tipping device
	· Manual model, various power levels
	· Remote control model, 3 power levels

NOTE: FOR APPLIANCE OPERATING WITH NATURAL GAS, YOU MUST CHANGE THE 7TH FIGURE ON CODE, PUTTING A "L" (EX. LF12M2 M0300).

RANGE

	Model	Code	Description
	12m	LF12M2 L0300	Manual ign. - galvanized and painted (transparent).
	12t	LF12A2 L0300	Rem. Control - galvanized and painted (transparent).
	12m	LF12M2 L0000	Manual ignition polished stainless steel.
	12t	LF12A2 L0000	Rem. Control polished stainless steel.

INSTALLATION TYPOLOGIES

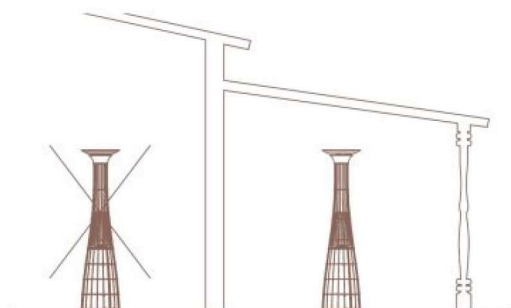




TECHNICAL DATA

Model	manual	remote-controlled	u.m.
Heat input nom.	12		kW
Heat input red. (Hs)	6,4 - 6,0 (l 2L)		kW
- G20/25	6,4 - 6,0 (l 2L)		kW
- G30/31	4,5 - 5,2 (3B/P 50mbar)	5,2 - 6,2 (3B/P 50mbar)	kW
Consumption			
- G20	1,14		m ³ /h
- G25	1,33		m ³ /h
- G30	872		g/h
- G31	858		g/h
Gas category			
- G20/25	I 2H		
- G30/31	I 3+		
Pressure supply gas G20	20	20	mbar
Pressure supply gas G25	-	-	mbar
Pressure supply gas G30	28-30	28-30	mbar
Pressure supply gas G31	37	37	mbar
Nozzle diameter G20/25	2,50	3,30	mm
Nozzle diameter G30/31	1,65	2,10	mm
Power supply	nr. 1 x 1,5 (type AA)	nr. 2 x 1,5 (type torcia D)	V
Power supply LED lights KIT	12		V

CONTROLS



Remote-controlled models:

- Appliance On/Off.
- Electronic ignition.
- Flame Regulation:
 - max
 - med
 - min
- Remote control receiver.
- Red light: ignition.
- Green light: command reception.
- On/Off Beep and receive command.



Radio remote control:

- Appliance On/Off.
- Electronic ignition.
- Flame Regulation:
 - max
 - med
 - min



Manual models:


- Appliance On/Off.
- Piezo ignition.
- Flame Regulation:
 - min
 - max



ACCESSORIES

	<i>Model</i>	<i>Code</i>	<i>Description</i>
	12t	70001552 00	Remote control.
	12	70001571 00	Coffee Table (external diameter Ø 80cm).
	12	70001561 00	LED lighting kit: led lights, rechargeable battery, recharge kit and battery support.
	12	70001562 00	Additional rechargeable battery.
	12	70004566 00	Additional trolley for transport.
	12	70001581 00	Big hat (outer diameter Ø 75cm).

INSTALLATION

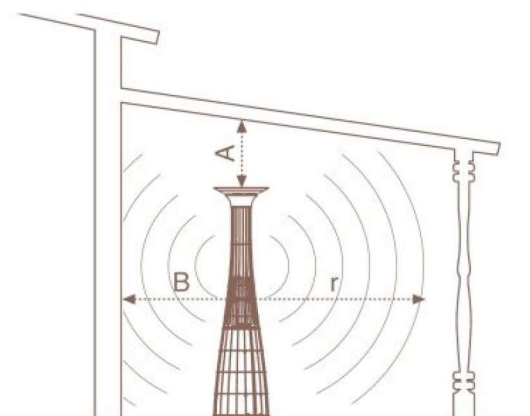

<i>Model</i>	<i>manual</i>	<i>rem. controlled</i>	<i>u.m.</i>
A min	0,5	0,5	m
B min	1	1	m
r max	3	3	m